


For protection of Electronic Telephone Systems, PBX's, KSU's and Key Systems .

FEATURES & BENEFITS

- UL 497 Listed for primary protection
- Utilizes industry standard 5-pin protector modules
- 110 IDC termination input and output
- High-impact, fire retardant housing
- Units can be cascaded to provide for expansion
- Can be mounted to 89 style stand-off brackets
- Compact, lightweight design
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

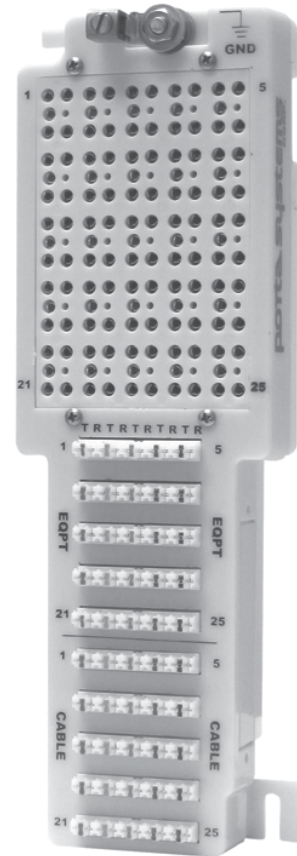

ORDERING INFORMATION


Model#	Pair Count	Input	Output	Modules	Module Model#
1525	25	110	110	None	NA
1525GT	25	110	110	230V Gas Tube	175BCXN-230
1525SS240	25	110	110	240V Solid State	115SCN-240
1525SS75	25	110	110	75V Solid State	115SCN-75
1525D230	25	110	110	230V Delta	195BCDXN-230
1525D75	25	110	110	75V Delta	195BCDXN-75

BUILDING ENTRANCE PROTECTOR



110 Termination

MECHANICAL SPECIFICATIONS FOR 1525 BUILDING ENTRANCE PROTECTOR:

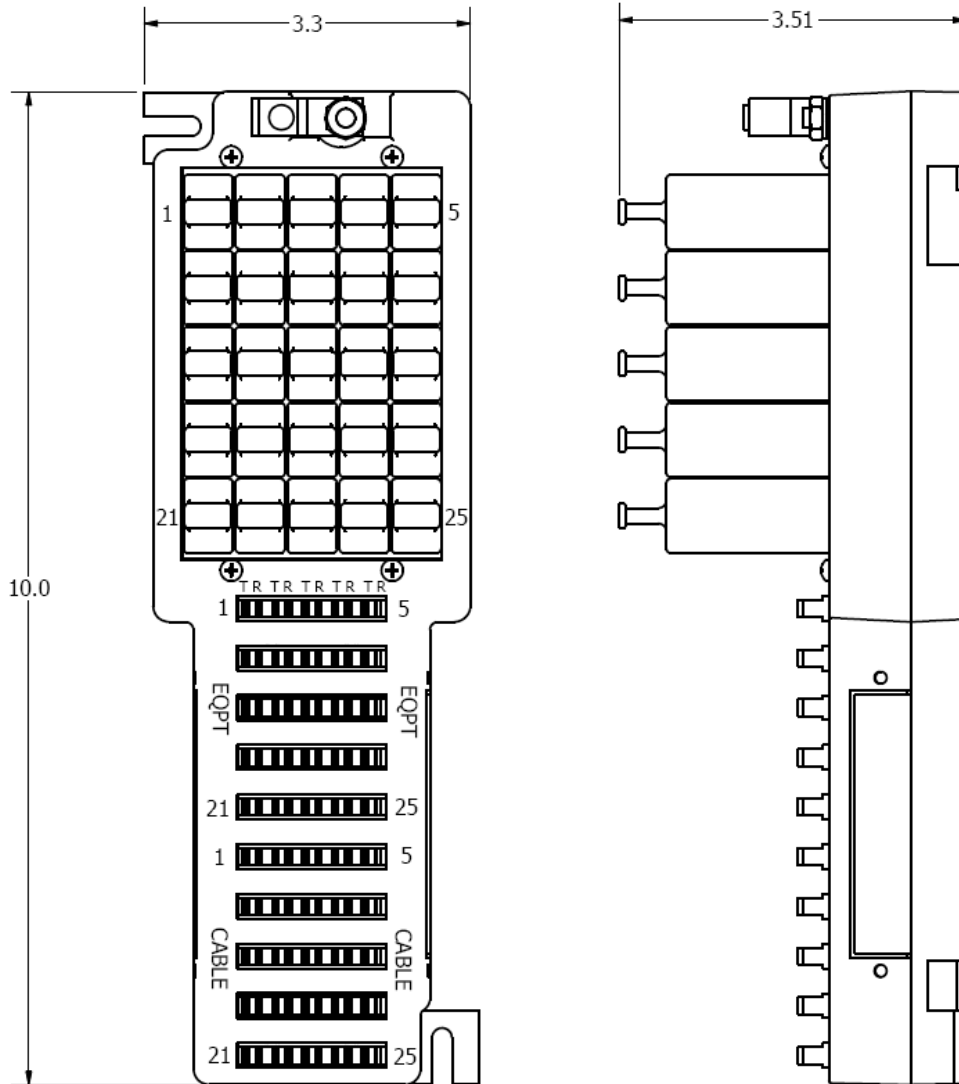

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
25 PAIR	10" x 3.4" x 3.5" (25.4 cm x 11.7 cm x 8.2 cm)	2 lbs.

* Weight - Add approx 0.5 oz per installed module.



For more information contact:
 6851 Jericho Turnpike, Suite 170
 Syosset, NY 11791 USA
 Tel. 1-516-364-9300 : Fx. 1.516.682.4636
 sales@portasystems.com (Americas)
 sales@portasystems.co.uk (Europe)