


At the point of demarcation, Building Entrance Terminals, or BET's, safeguard communication equipment from damaging electrical surges that may get onto those incoming lines.

FEATURES & BENEFITS


- UL 497 Listed for primary and secondary protection
- Available with a variety of termination choices, and in 25, 50 and 100-pair configurations
- Stub input (26 gauge cable) and stub output (24 gauge cable)
- Manufactured from 16 gauge, epoxy powder coated steel
- Uses industry standard 5-pin protector modules
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

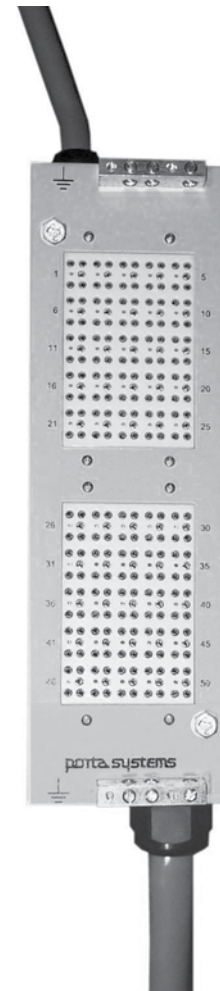

ORDERING INFORMATION

Model#	Pair Count	Input	Output	Modules	Module Model#	Cover
26050-ST-MST	50	ST	ST	None	NA	No

MECHANICAL SPECIFICATIONS FOR 26050-ST-MST BUILDING ENTRANCE TERMINAL:

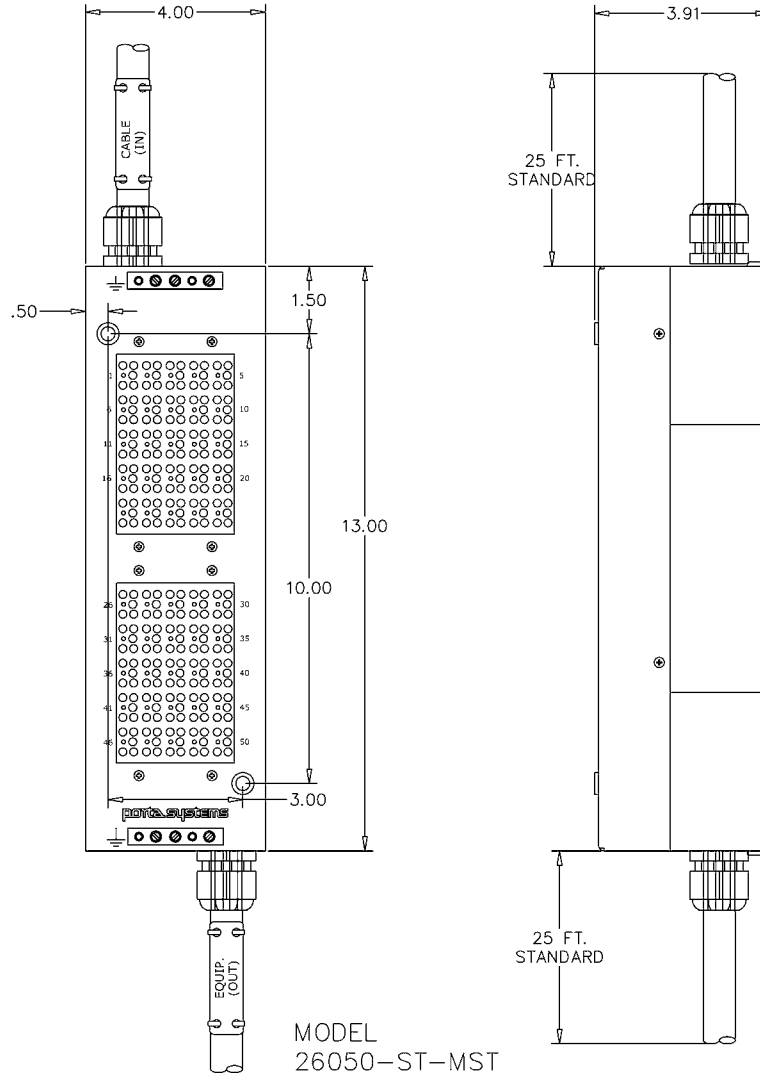

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
50 PAIR	13" x 4" x 3.72" (33.1 cm x 10.16 cm x 9.5 cm)	9 lbs.

* Weight - Add approx 0.5 oz per installed module.



For more information contact:
 6851 Jericho Turnpike, Suite 170
 Syosset, NY 11791 USA
 Tel. 1-516-364-9300 : Fx. 1.516.682.4636
 sales@portasystems.com (Americas)
 sales@portasystems.co.uk (Europe)