


Vital line protection for multi-story buildings.

FEATURES & BENEFITS


- Dependable sneak current protection for up to 25 lines
- Protects against fire causing current overloads in walls and floors
- 66 and RJ21 male termination
- Protects personnel, property and electronic equipment
- Sturdy UL 94-V0 fire retardent housing
- UL 497A Listed - Secondary protection
- Modular design allows for easy custom configuration
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

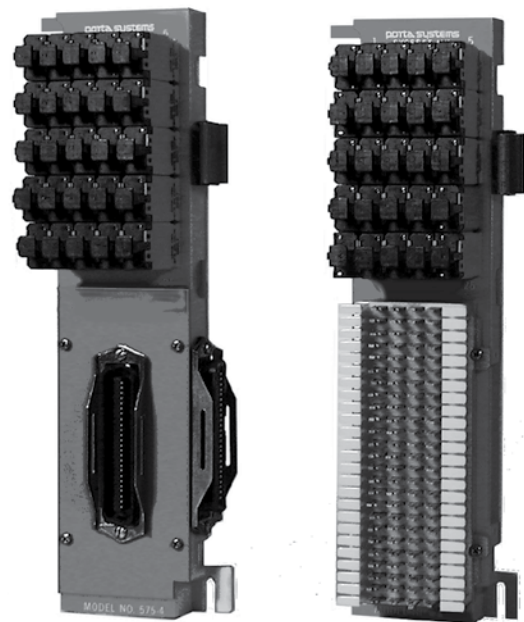

ORDERING INFORMATION

Model#	Cable Side Termination	Equipment Side Termination
575-1UL	66	RJ21 Female
575-2UL	66	66 with Network Disconnect RJ21
575-3UL	66	RJ21 Male
575-4UL	RJ21 Male	RJ21 Female
575-5UL	66	66
25AUL	Sneak Fuse Replacement Protector	

MECHANICAL SPECIFICATIONS FOR SERIES 575 SNEAK FUSE ASSEMBLY:

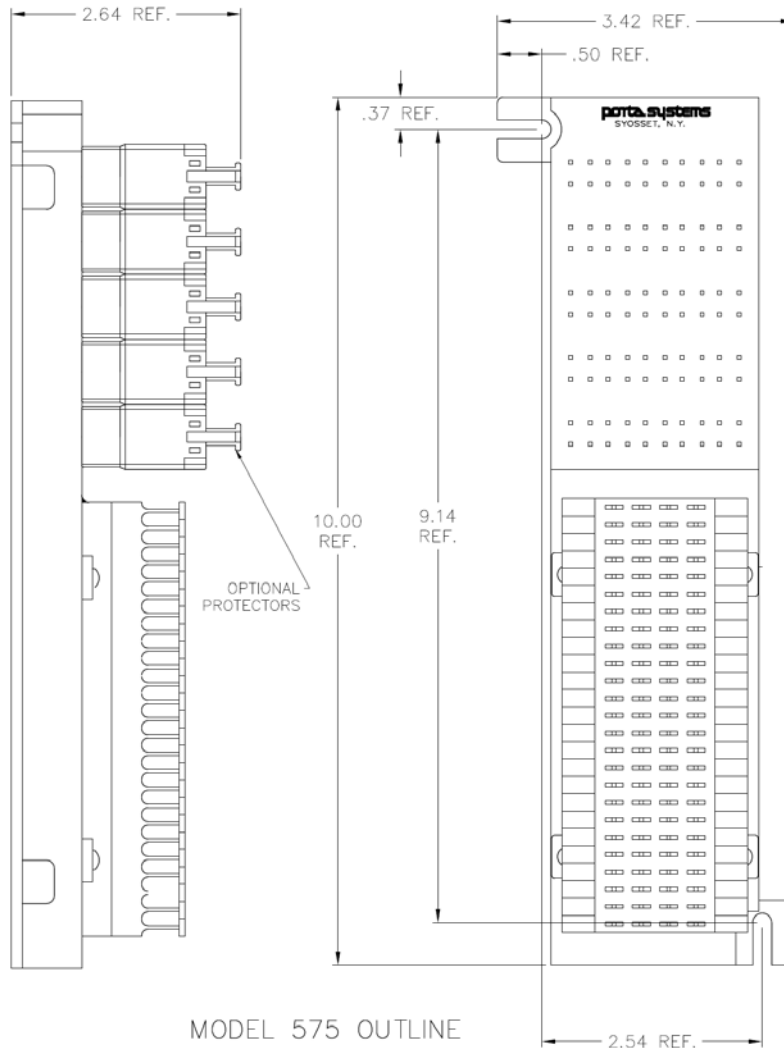

MODEL 575 OUTLINE

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
25	10" x 3.42" x 2.64" (25.4 cm x 8.7 cm x 6.7 cm)	2 lbs

* weight - Add approx 0.5 oz per installed module.



For more information contact:
 6851 Jericho Turnpike, Suite 170
 Syosset, NY 11791 USA
 Tel. 1-516-364-9300 : Fx. 1.516.682.4636
 sales@portasystems.com (Americas)
 sales@portasystems.co.uk (Europe)