





The 581 and 1581 are ideal protectors for voice installations, PBX's, key systems, or any communication systems connected to outside plant cable. Porta Systems Protectors provide the same high quality connection and protection capabilities as standard building entrance terminals in a compact lightweight design.

FEATURES & BENEFITS

- UL 497 and UL 497A listed for primary and secondary protection
- Available loaded with choices of Gas Tube, Solid State, or Delta protector modules
- 66 or 110 IDC termination input and output
- Compact, lightweight design
- High-impact, fire retardant housing
- Can be mounted to 89 style stand-off brackets
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

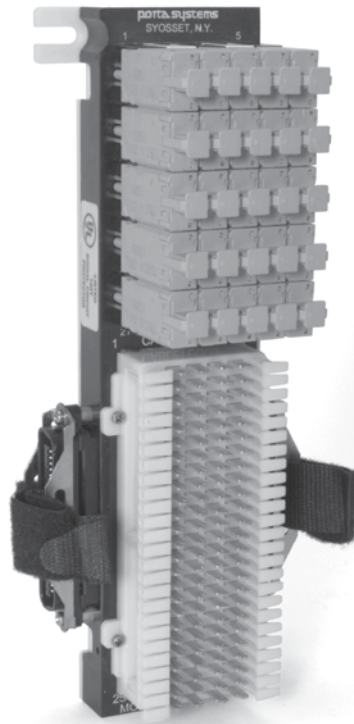

581

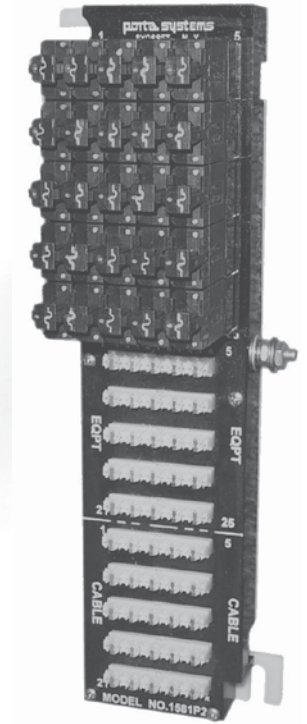

1581

ORDERING INFORMATION

Model#	DC Breakdown Voltage	Pair Count	Termination
581P225GT	230	25	66
581P225SS240	240	25	66
581P4INT	230	25	RJ21 (In/Out)
581P225D75	75	25	66
581P225D230	230	25	66
1581P22SGT	230	25	110
1581P225SS240	240	25	110
1581P225D75	75	25	110
1581P225D230	230	25	110

581 & 1581



CUSTOMER PREMISE PROTECTION PRODUCTS

PROTECTOR BLOCKS



Single-Pin

MECHANICAL SPECIFICATIONS FOR PROTECTOR BLOCKS:

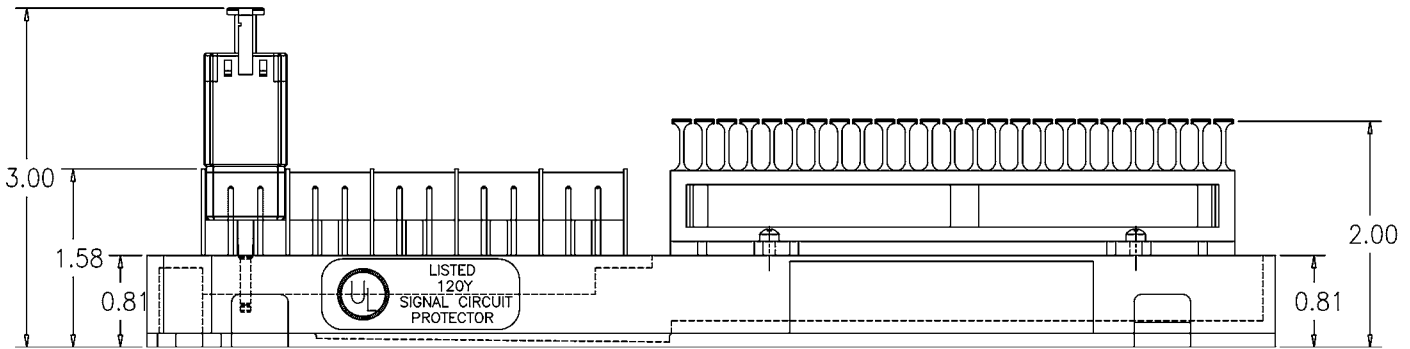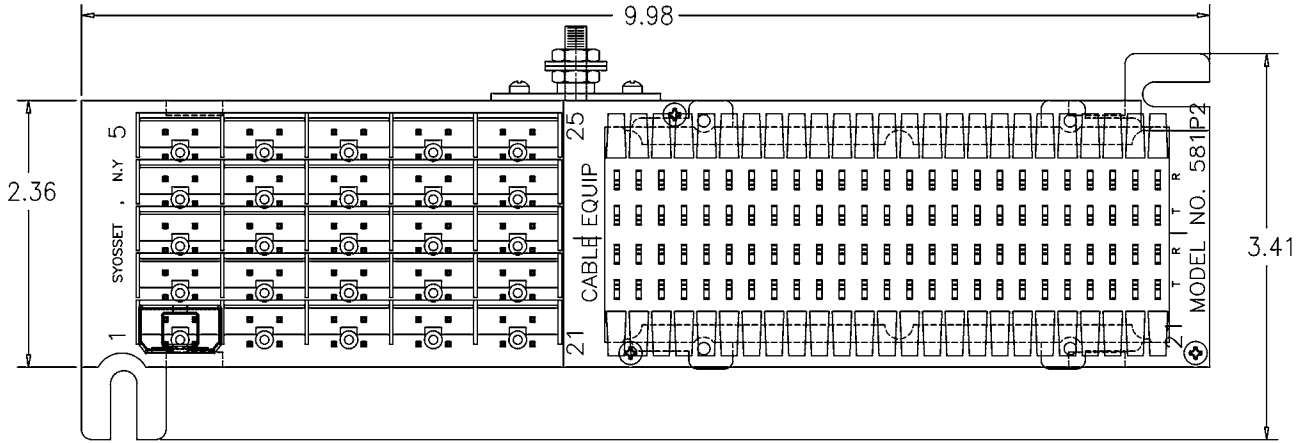

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
25	10" x 2.36" x 3" (25.4 cm x 6 cm x 7 cm)	2 lbs

* weight - Add approx 0.5 oz per installed module.



For more information contact:
 6851 Jericho Turnpike, Suite 170
 Syosset, NY 11791 USA
 Tel. 1-516-364-9300 : Fx. 1.516.682.4636
 sales@portasystems.com (Americas)
 sales@portasystems.co.uk (Europe)