




The Mini-CAM is a high density, single-sided, low profile frame developed to accommodate all types of switching systems for medium to large telecom sites. Its versatility allows use for Special Service circuits, Tie Cables, Trunks or as an Intermediate Distributing Frame (IDF). It is configurable for 400 to over 15,000 pairs. Connectors offer a choice of bifurcated IDCs (Insulation Displacement Clips), bifurcated wire wrap terminals, or 66-clip termination. Special test and communications panels are available including: Test Panel, Combination AC Outlet/Protector Module Tester Panel, and Communications Panel.

FEATURES & BENEFITS

- High density
- Single-sided administration and installation
- Wall or floor mountable
- Snap-in block
- Spacious wiring troughs
- Low 84" working height and cable from above, below or both
- Choice of termination methods and 5-pin or 1-pin connector blocks
- Factory tested pre-wired connector block
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

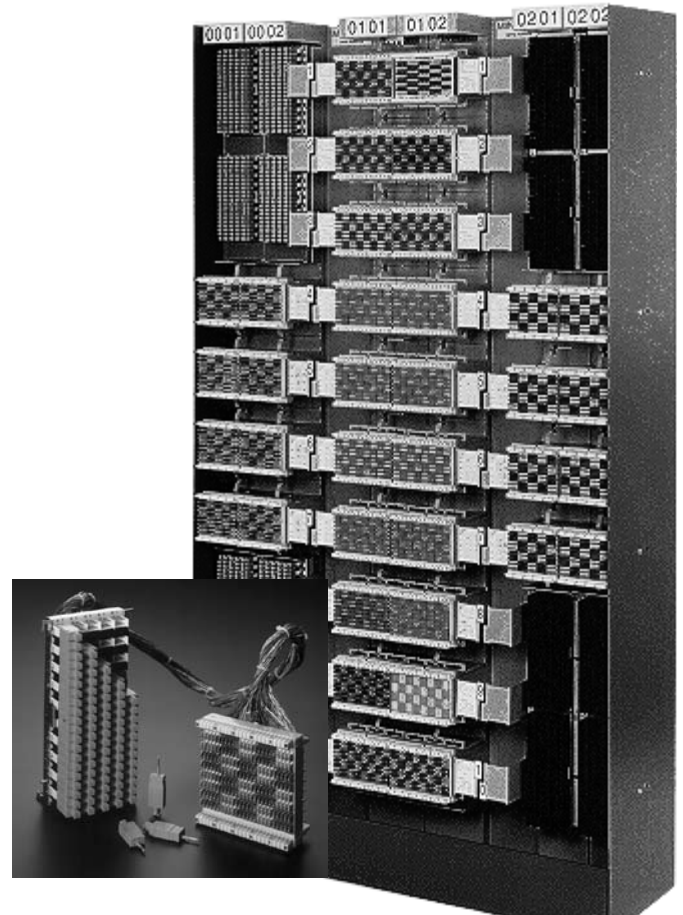

ORDERING INFORMATION

Model#	Termination Style	1 or 5-pin connector block assemblies
508PC1/PTS-100BQ	Bifurcated, quick-clip	1-pin
508PC1/PTS-100BW	Bifurcated, wire-wrap	1-pin
508PC1/PTS-100X	Single, quick-clip (66-type)	1-pin
508PC1	w/o Terminal Block	1-pin
508PC51/PTS-100BQ	Bifurcated, quick-clip	5-pin
508PC51/PTS-100BW	Bifurcated, quick-clip	5-pin
508PC51/PTS-100BX	66-type quick clip	5-pin
508PC51	w/o Terminal Block	5-pin