

The P399 protects personnel and expensive equipment from damaging electrical surges that may get onto incoming cable lines. It mounts on conventional central office frames with 8 inch centers.

Porta Systems P399 is a compact 100-pair connector that utilizes industry standard 5-pin protector modules.

FEATURES & BENEFITS

- 100-pair front facing test field
- Compact design saves space and increases number of protected pair per frame vertical
- Accepts industry standard 5-pin protector modules
- Gold plated protector module sockets and test field contacts for superior electrical contact that eliminate noise problems
- Fanning strips allow easy wire management for both field stubbing and cross connection to horizontal blocks bracket
- Front ground test point offers labor savings and reliability
- Factory stubbed units available
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)



ORDERING INFORMATION

Model#	Pair Count	Description
P-399-WW	100	Wire-Wrap Terminations
P399-WW (22 or 24 x__)*	100	Wire-Wrap Terminations and Factory Stubbed
P399-QC	100	Quick-Clip Terminations
P399-QC (22 or 24 x__)*	100	Quick-Clip Terminations and Factory Stubbed

*Factory Stubbed Blocks add "24 or 22" to indicated cable AWG, "x" and length of cable required. For Example: P399-WW (24x50)

P399


CENTRAL OFFICE CONNECTORS

100-PAIR CONNECTOR

porta systems
CORP.

Wire-Wrap & Quick Clip

MECHANICAL SPECIFICATIONS FOR P399 CENTRAL OFFICE CONNECTOR:

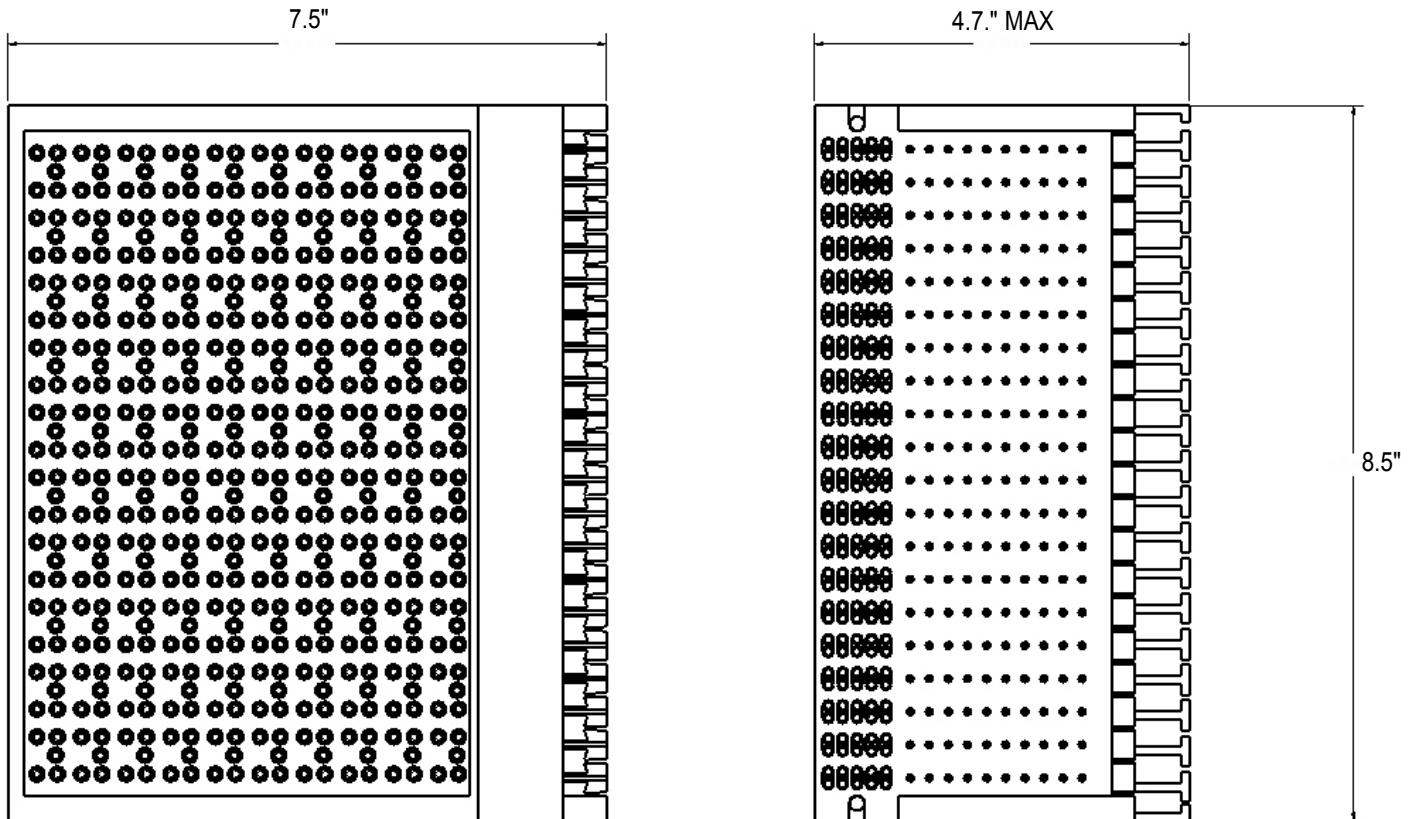

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
100 PAIR	8.5" x 4.5" x 7.5" (22 cm x 12 cm x 19 cm)	4.7 lbs.



For more information contact:
6851 Jericho Turnpike, Suite 170
Syosset, NY 11791 USA
Tel. 1-516-364-9300 : Fx. 1.516.682.4636
sales@portasystems.com (Americas)
sales@portasystems.co.uk (Europe)