


For termination and protection of digital and analog telephone systems.

### FEATURES & BENEFITS


- Ultra low capacitance Solid State Technology provides protection for frequencies up to 100 MHz for CAT 5E performance
- UL 497, 497A and UL 497B listed for Primary, Secondary, and Isolated Loop Circuit Protection
- 110 termination
- Designed for use in enclosure
- Available with factory installed modules
- Modular design allows for easy custom configuration
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

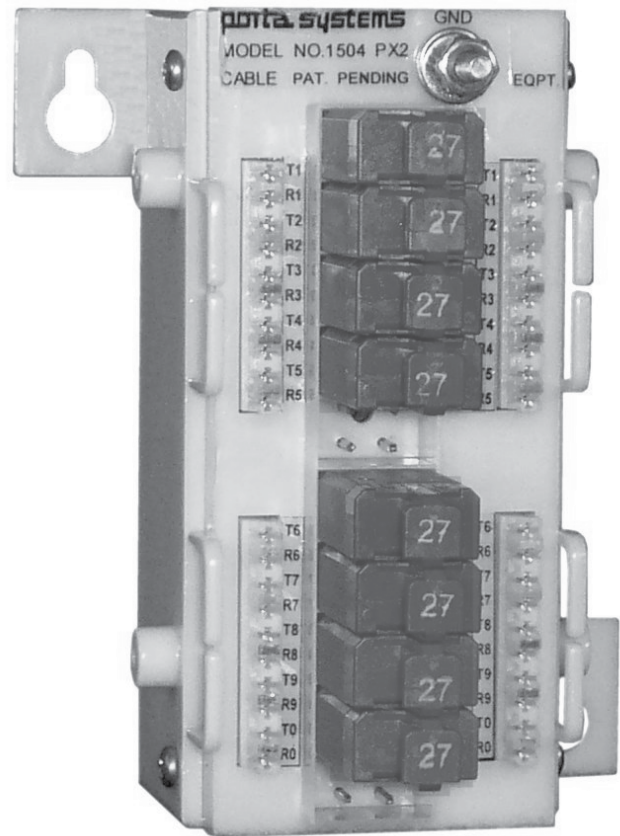


### ORDERING INFORMATION

# of Protectors	Termination	Gas Tube (230V)	Delta (75V)	Delta (230V)	Delta (350V)	Solid State (230V)
6	110	1504PX26GT	1504PX26D75	1504PX26D	1504PX26D350	1504PX26SS
10	110	1504PX210GT	1504PX210D75	1504PX210D	1504PX210D350	1504PX210SS

**MECHANICAL SPECIFICATIONS FOR 1504PX PROTECTOR PACK:**

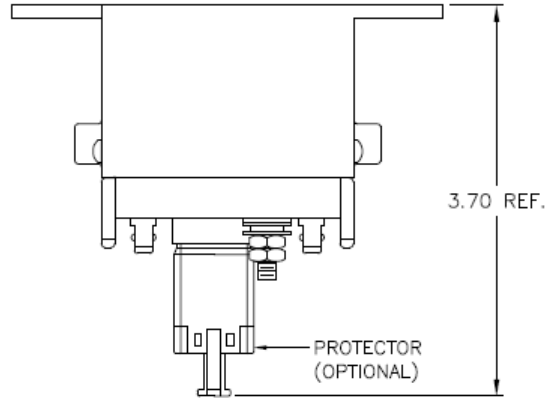

MODEL 1504 PX2

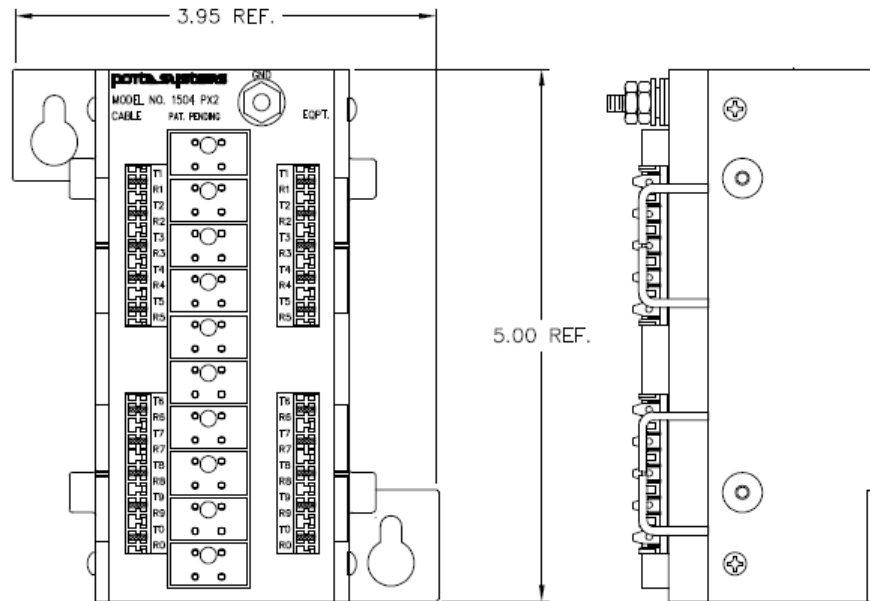

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
10	5" x 4" x 3.5" (12.7 cm x 10.2 cm x 8.9 cm)	2 lbs.

\* Weight - Add approx 0.5 oz per installed module.



For more information contact:  
 6851 Jericho Turnpike, Suite 170  
 Syosset, NY 11791 USA  
 Tel. 1-516-364-9300 : Fx. 1.516.682.4636  
 sales@portasystems.com (Americas)  
 sales@portasystems.co.uk (Europe)